

TubeJet® Pulse-Cleaned Dust Collectors



Cylindrical Series – CBR

Side Bag Removal Dust Collectors and Filter Receivers

- 50-25,000 ACFM Capacities
- 20" w.g. to 17" Hg design pressures
- Full vacuum
- ASME code stamped housings
- Construction to 500°F design temperature

These collectors are ideal for high pressure, low headroom applications.

OSHA-compliant
combustible
dust explosion
protection per
NFPA 654, 68 & 69

Benefits of Cylindrical Design

- High pressure and vacuum designs
- No corners for superior cleanability
- Round walls eliminate "cold spots" and condensation in high heat applications
- Conical hopper promotes easy discharge of collected dusts
- Cyclonic inlets handles high dust loads (optional)

Optimum Pulse-Cleaning

- Adjustable solid state timer for fine tuning cleaning system
- On-demand cleaning to reduce compressed air consumption (optional)
- Varying pulse valve sizes matched to filter bags (length, number of bags)

High Filtration Efficiency


- Wide range of bag fabrics and finishes
- Pleated bag designs available

Custom Design Options

- Configurable hopper slope/discharge
- 6" nominal diameter bag diameter (optional 4-1/2" diameter for light bulk density applications)

Inlet Options

- Tangential inlet (internal cyclone ring)
- Surge hopper
- Abrasion-resistant inlets

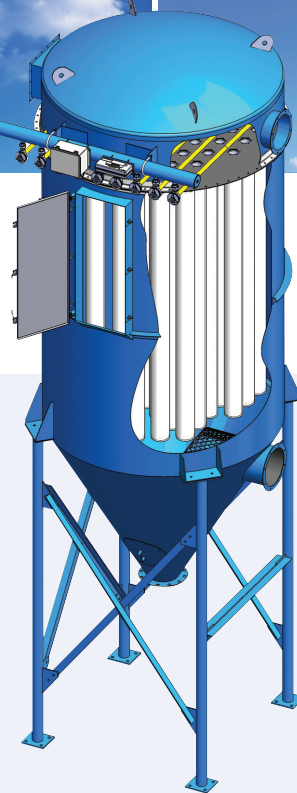

Sly Standard Construction Benefits

- Radial low velocity dual stage inlet with diffuser decreases turbulence
- 12 vertical wire cage provides extra support, minimizing bag wear

Options

- Supports designed to ASCE-7
- Access platforms, straight or perimeter
- Blowers
- Discharge valves
- Explosion protection
- Sprinklers
- ANSI flanges (150 or 300 lb)
- Carbon, stainless or alloy construction
- Man grids

SLY

INC

TECHNOLOGY FOR A
CLEAN ENVIRONMENT

8300 Dow Circle, Suite 600, Strongsville, OH 44136

800-334-2957

Fax: (440) 891-3210 E-mail: info@slyinc.com

Web: www.slyinc.com