

SLY PleatJet II Plus Horizontal Cartridge Filter


Model No.	Standard Media * Area (Sq. Ft.)	Spun Bonded Media Area* (Sq. Ft.)	Cartridge Quantity	Air Usage (SCFM @ 80 PSIG) **	A	B
HCF-4-4-26	3616	1792	16	4	85"	77"
HCF-6-4-26	5424	2688	24	4	125"	117"
HCF-8-4-26	7232	3584	32	4	165"	157"
HCF-10-4-26	9040	4480	40	4	205"	197"
HCF-12-4-26	10,848	5376	48	4	245"	237"
HCF-14-4-26	12,656	6272	56	4	285"	277"
HCF-16-4-26	14,464	7168	64	4	325"	317"

How to Determine Your Model Number

HCF - $\frac{4}{\text{Number of valves}}$ - $\frac{4}{\text{Number of cartridges per row}}$ - $\frac{26}{\text{Length of cartridges}}$

**Based on 20 second off time between pulses and 100 millisecond pulse duration (Approx.)

*Standard based on Cellulose/Synthetic Media (Other available media may have less filter area)

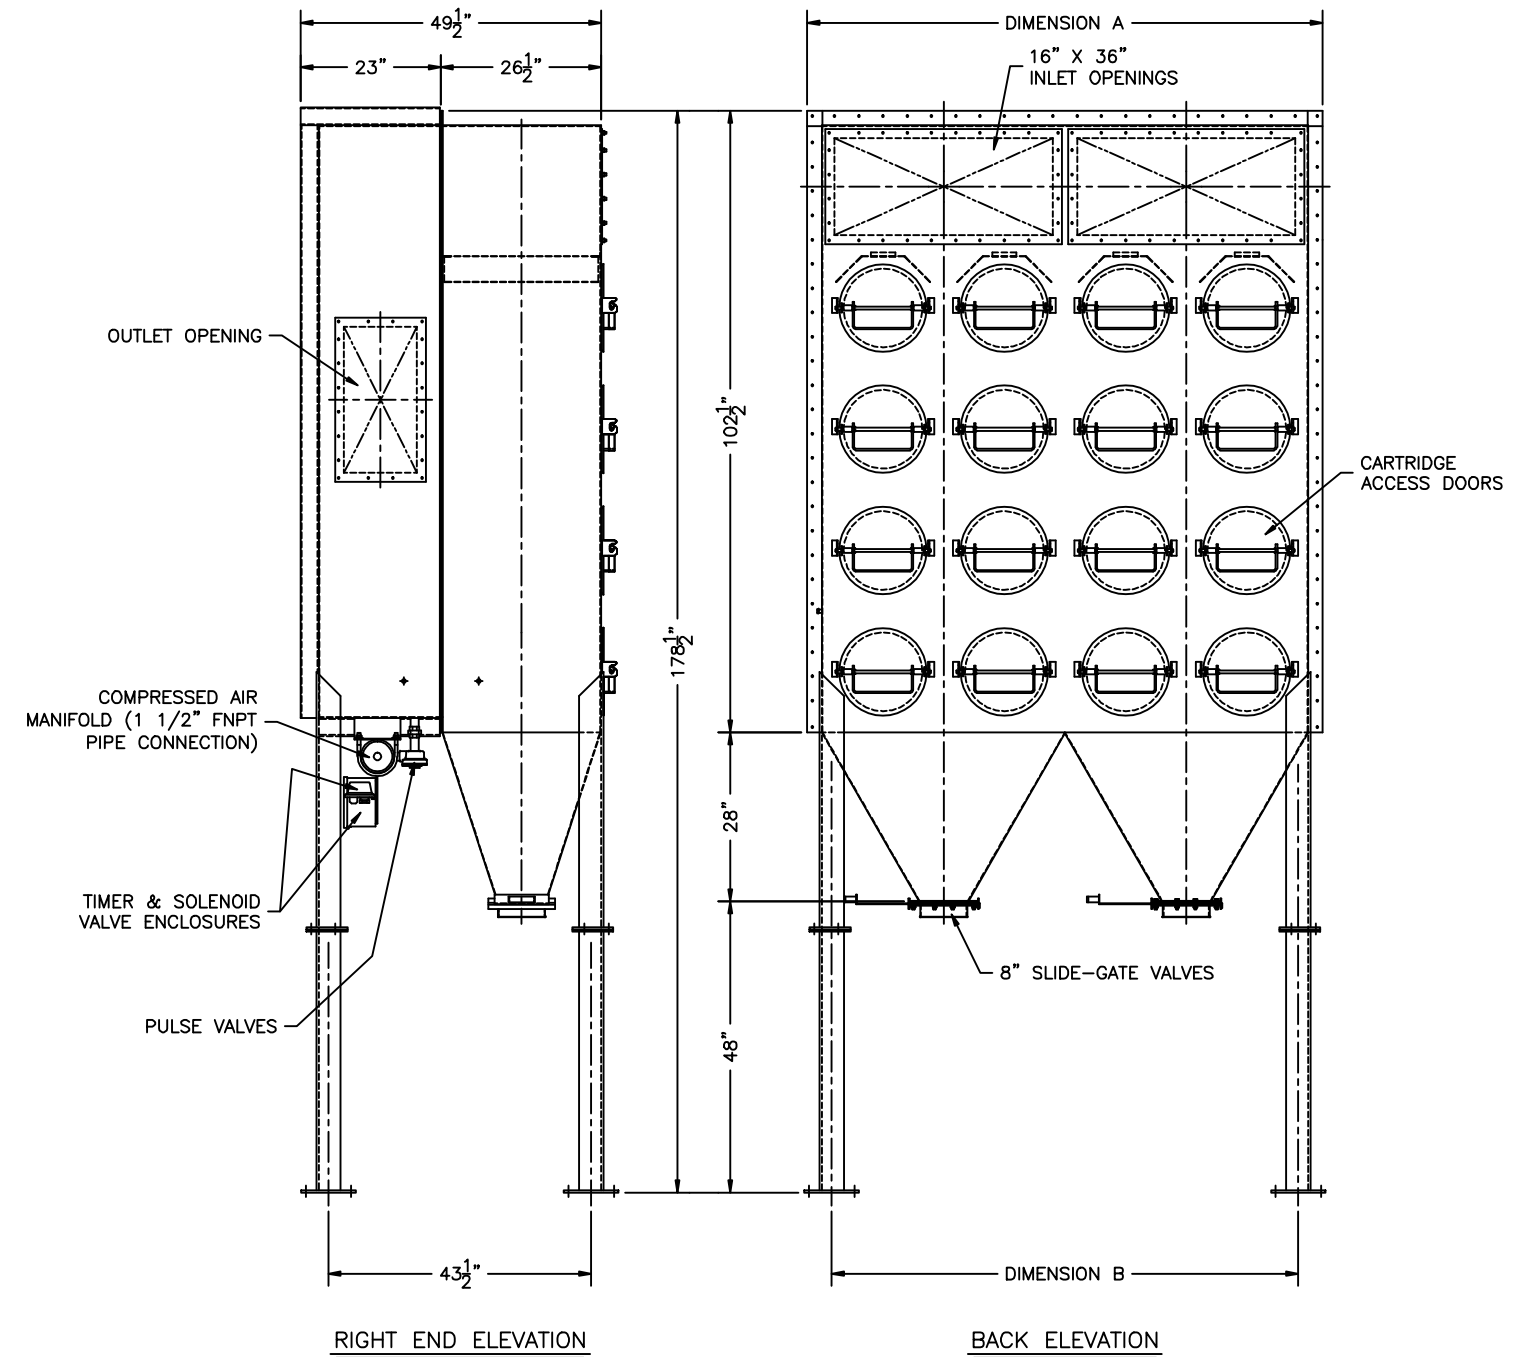

MODEL NO. HCF- _____
 VOLUME _____ CFM
 TEMPERATURE _____ °F
 DUST _____
 LOADING _____ GR/CF
 MEDIA AREA _____ SQ.FT.
 NO. OF CARTRIDGES _____
 A/C RATIO _____ :1
 PROCESS _____

NOTES:
 - Inlet size based on 3000 fpm maximum velocity.
 - Standard exhaust connection either right or left of header.
 - Six (6) leg support for model HCF-8-3 and all all units larger.
 - Magnehelic gauge w/ bracket, tubing & fittings.
 - Unless otherwise specified, timers shipped assembled & pre-wired to solenoid enclosure.
 - Drawing dimensions are subject to change without prior notice.
 - Delta P Module for on-demand cleaning
 - NOT FOR CONSTRUCTION

SLY
INC.

TECHNOLOGY FOR A CLEAN ENVIROMENT

8300 Dow Circle
 Strongsville, OH 44136
 1-800-334-2957
 In Ohio (440) 891-3200
 FAX: (440) 891-3210

HCF-500-4-26-A