

Packed Tower Scrubbers



Collect and Absorb Vapors and Gases

Packed tower scrubbers are designed for chemical scrubbing of gaseous contaminants from air streams. They are also referred to as packed bed or packed column absorbers. Internal packing in the scrubber vessel provides a large wetted surface area to induce intimate contact between the contaminated air and the scrubbing liquid. The contaminant absorbs into or reacts with the scrubbing liquid. Recirculated scrubbing liquid typically contains alkaline, acid, or oxidizing scrubbing agents to achieve the desired outlet emissions.

Custom Engineered for Your Specific Application

Sly's custom designed and fabricated packed tower scrubbers are engineered for specific applications for optimum tower diameter, packing depth, recirculation flow rate, and the appropriate mist eliminator style. Packed tower scrubbers can be designed to handle a wide range of airflows and can be constructed from a variety of metallic and non-metallic materials. Packed tower systems, when designed correctly, can successfully absorb and neutralize harmful, toxic gas streams and exhaust clean air into the atmosphere. Applications range from product recovery to air pollution and odor control.

How Packed Towers Work

In vertical, countercurrent scrubber operation, the gas flows upward through the bed, while the liquid irrigates downward by gravity through the bed. A liquid distribution header evenly distributes the scrubbing solution across the top of the packing. Traveling a torturous route through the packing extends the contact time between the air and the liquid and increases the intimacy of gas and liquid contact. The type of gas and the desired removal efficiency will determine the bed depth, packing size, irrigation rate, and chemical requirement. Prior to leaving the scrubber, the scrubbed air passes through a mesh or chevron style mist eliminator to remove entrained droplets.

Liquid Treatment Optimizes Efficiency

Packed towers are commonly used to remove SO_2 , HCl , NH_3 , H_2S , and other gases. Some applications may require the use of two or more chemical additives. The most commonly used chemical additives are:

- Sodium hydroxide (alkali) or sulfuric acid (acid) for pH control
- Sodium hypochlorite or hydrogen peroxide for ORP (oxidation reduction potential) control

Liquid can often be discharged to the sanitary sewer without further treatment.



Packed tower for SO_2 absorption and neutralization for petrochemical industry.

Packed Tower Scrubbers




Standard Equipment

- Packing to promote mass transfer
- Packing support
- Liquid distributor
- Mist eliminator
- Recirculation tank

Optional Equipment and Features

- Stainless steel, FRP, or high alloy construction
- Instrumentation and controls
- Exhaust fan
- Recirculation pump
- Chemical feed system

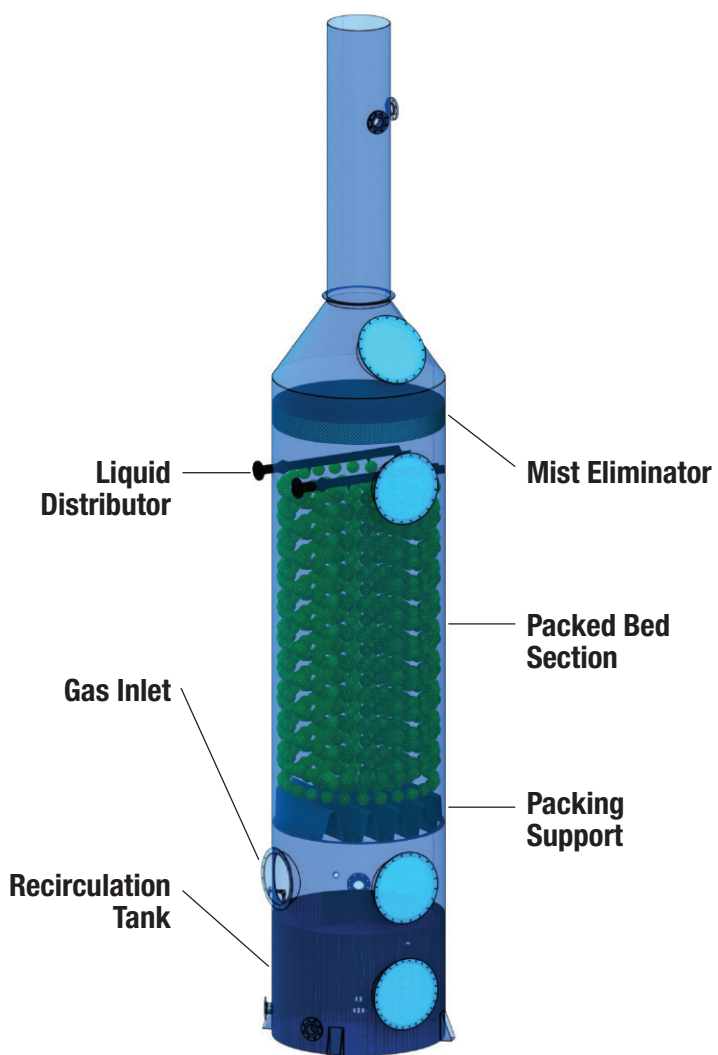

Packed tower and quench of high alloy for pharmaceutical industry.



8300 Dow Circle, Suite 600, Strongsville, OH 44136

800-334-2957

Fax: (440) 891-3210 E-mail: info@slyinc.com

Web: www.slyinc.com