


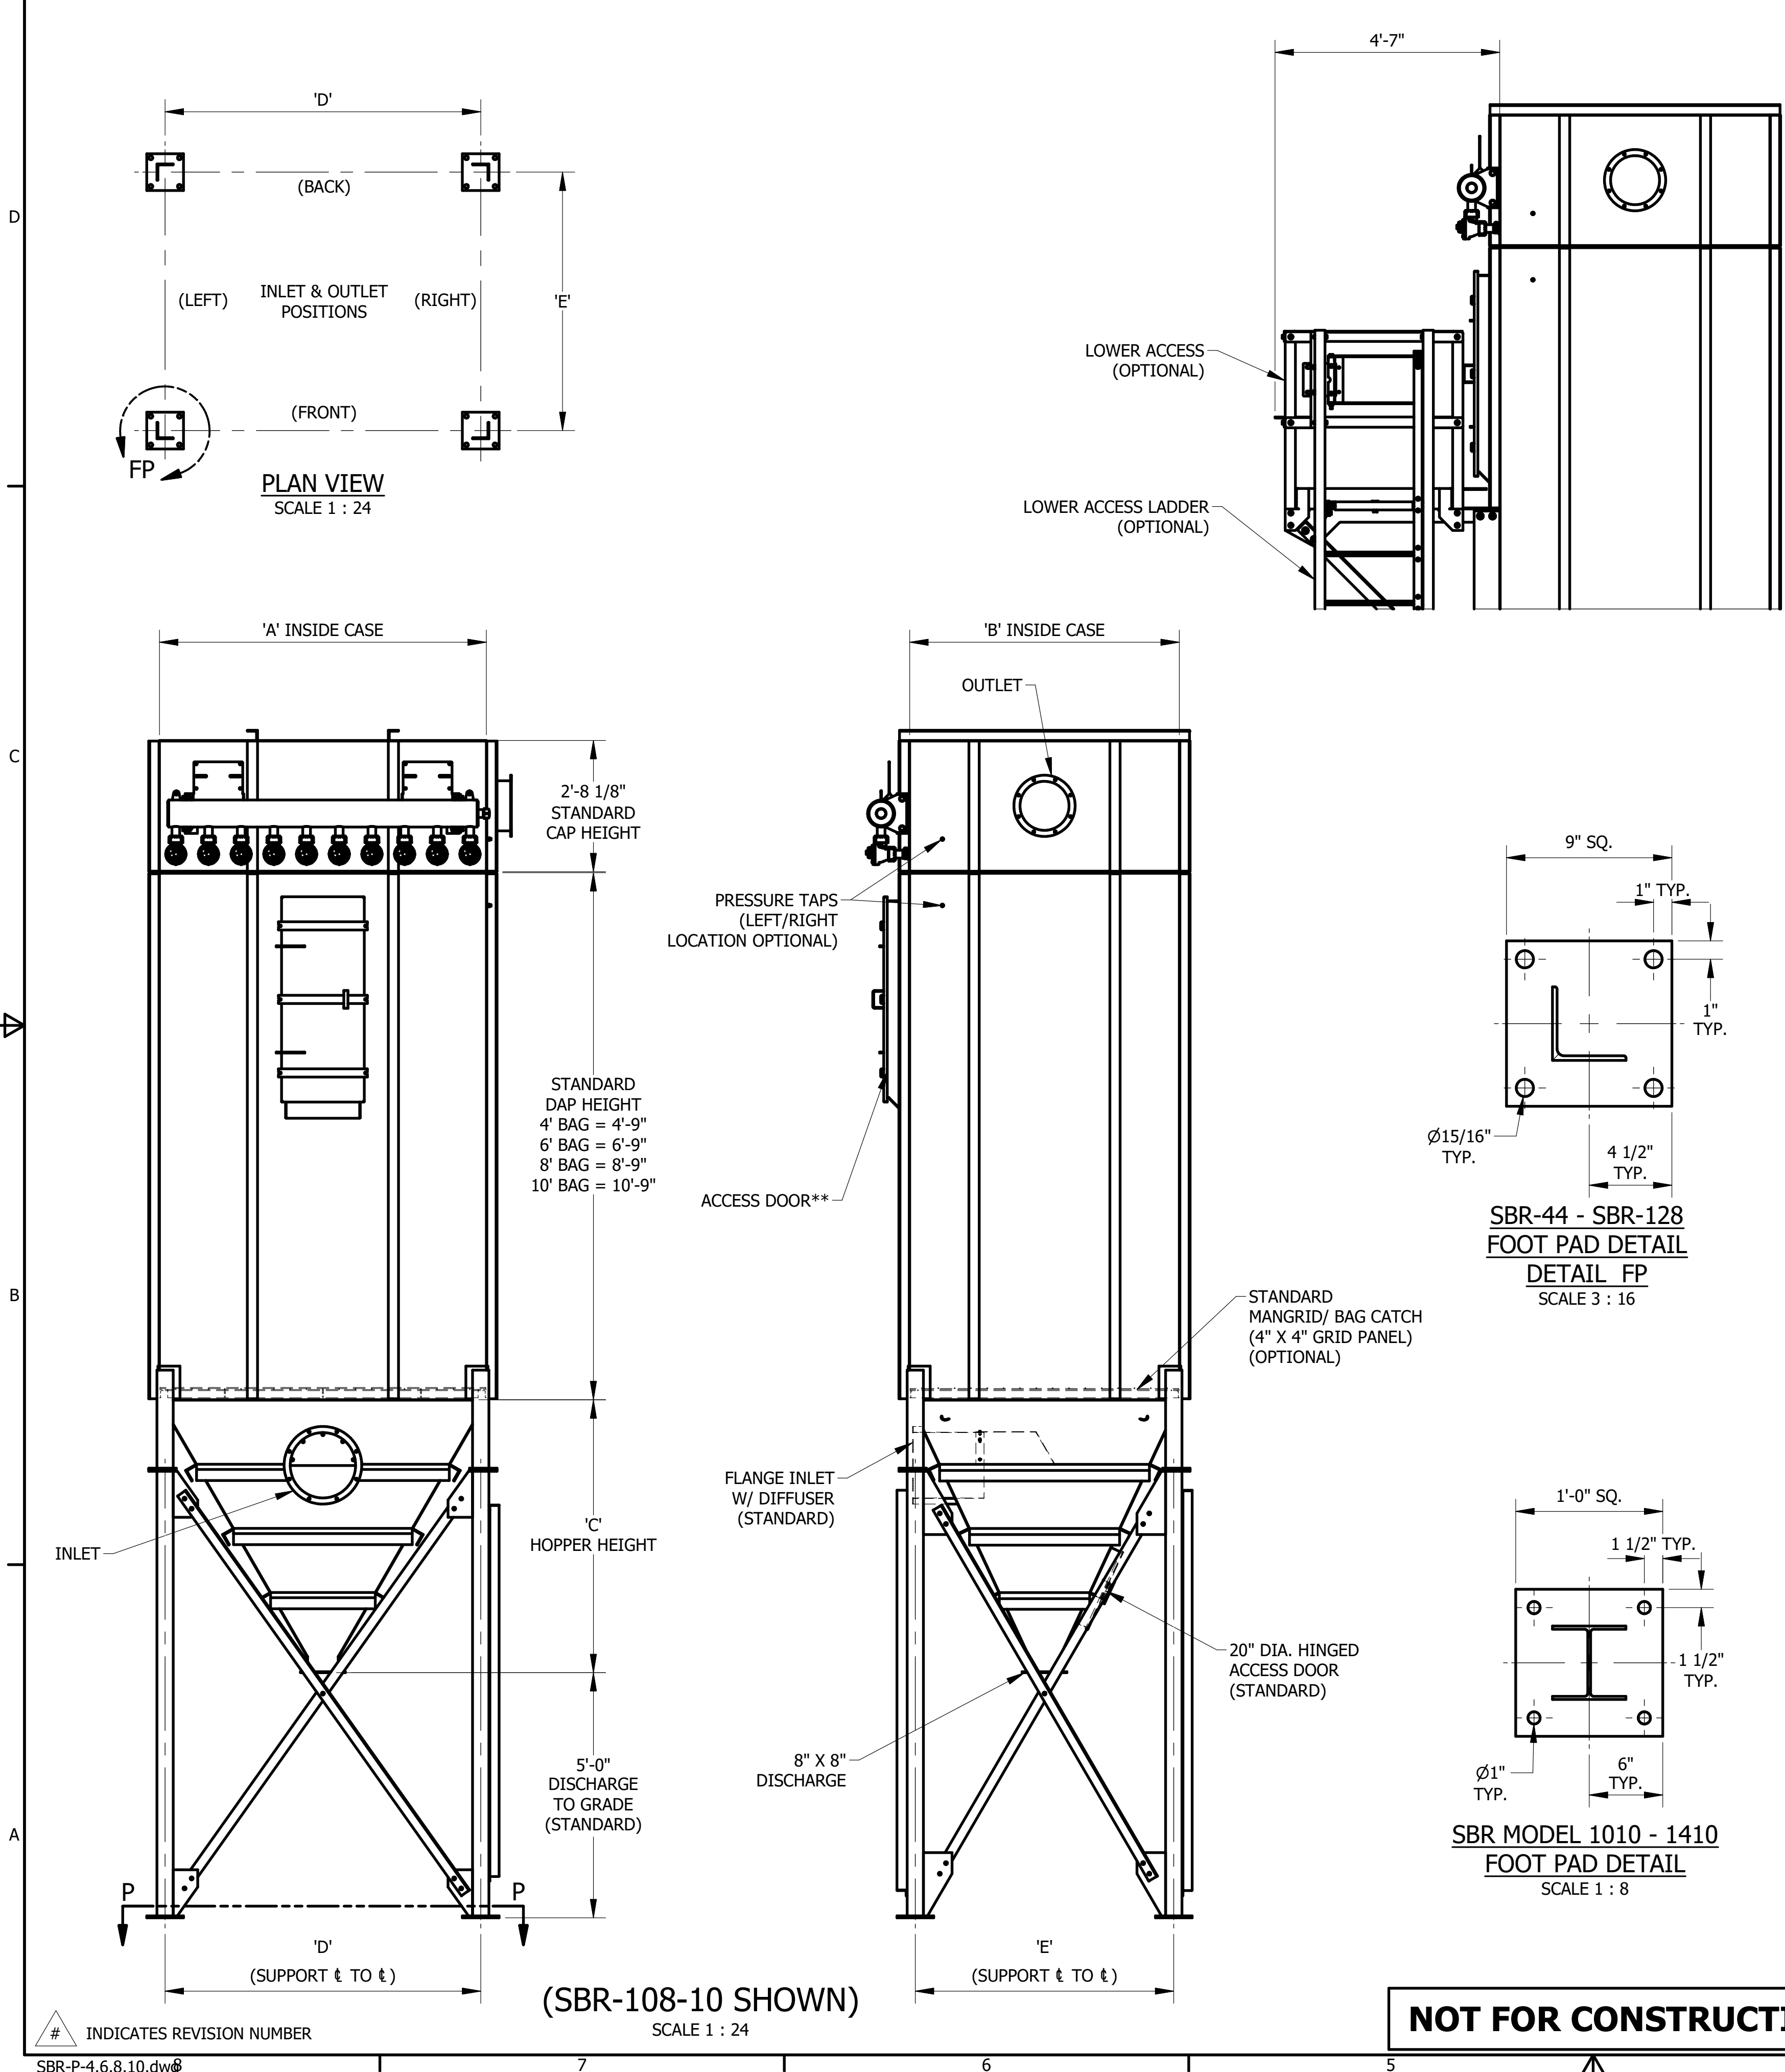

SBR Standard Sizes										
Model No.	Bag Length (ft.)	Bag Dia. (in.)	Cloth Area (sq.ft.)	Bag Qty.	*Air Usage (SCFM @ 90 psig)*	A	B	C	D	E
SBR-44	4	4.5 / 6	78 / 96	16	11	2'-8"	2'-10"	2'-4"	2'-5 1/4"	2'-7 1/4"
	6	4.5 / 6	117 / 144							
	8	4.5 / 6	155 / 192							
	10	4.5 / 6	194 / 240							
SBR-46	4	4.5 / 6	118 / 144	24	11	2'-8"	4'-2"	3'-5"	2'-5 1/4"	3'-11 1/4"
	6	4.5 / 6	175 / 216							
	8	4.5 / 6	233 / 288							
	10	4.5 / 6	290 / 360							
SBR-66	4	4.5 / 6	176 / 216	36	11	4'	4'-2"	3'-5"	3'-9 1/4"	3'-11 1/4"
	6	4.5 / 6	263 / 324							
	8	4.5 / 6	349 / 432							
	10	4.5 / 6	436 / 540							
SBR-68	4	4.5 / 6	235 / 288	48	11	4'	5'-6"	4'-7"	3'-9 1/4"	5'-3 1/4"
	6	4.5 / 6	350 / 432							
	8	4.5 / 6	466 / 576							
	10	4.5 / 6	581 / 720							
SBR-88	4	4.5 / 6	314 / 384	64	11	5'-4"	5'-6"	4'-7"	5'-1 1/4"	5'-3 1/4"
	6	4.5 / 6	467 / 576							
	8	4.5 / 6	621 / 768							
	10	4.5 / 6	774 / 960							
SBR-108	4	4.5 / 6	392 / 480	80	11	6'-8"	5'-6"	5'-7"	5'-5 1/4"	5'-3 1/4"
	6	4.5 / 6	584 / 720							
	8	4.5 / 6	776 / 960							
	10	4.5 / 6	968 / 1200							
SBR-128	4	4.5 / 6	470 / 576	96	11	8'	5'-6"	6'-9"	7'-9 1/4"	5'-3 1/4"
	6	4.5 / 6	701 / 864							
	8	4.5 / 6	931 / 1152							
	10	4.5 / 6	1162 / 1440							
SBR-1010	4	4.5 / 6	490 / 600	100	24	6'-8"	6'-10"	5'-9"	6'-7 1/4"	6'-9 1/4"
	6	4.5 / 6	730 / 900							
	8	4.5 / 6	970 / 1200							
	10	4.5 / 6	1210 / 1500							
SBR-1210	4	4.5 / 6	588 / 720	120	25	8'	6'-10"	6'-9"	7'-11 1/4"	6'-9 1/4"
	6	4.5 / 6	876 / 1080							
	8	4.5 / 6	1164 / 1440							
	10	4.5 / 6	1452 / 1800							
SBR-1410	4	4.5 / 6	686 / 840	140	31	9'-4"	6'-10"	7'-11"	9'-3 1/4"	6'-9 1/4"
	6	4.5 / 6	1022 / 1260							
	8	4.5 / 6	1358 / 1680							
	10	4.5 / 6	1694 / 2100							

How to Determine Your Model Number

SBR - **6** - **8** - **8**

NUMBER OF ROWS NUMBER OF BAGS PER ROW LENGTH (FT.) OF BAGS

* Guideline based on 10 second off time between pulses and 100 millisecond pulse duration ~ may change based on application.

** Access Door
- 18" x 24" for 4' Long Bags
- 18" x 36" for 6' Long Bags
- 24" x 48" for 8' Long Bags
- 24" x 60" for 10' Long Bags

NOTES:

- INLET SIZE BASED ON 3000 FPM MAXIMUM VELOCITY.
- STANDARD EXHAUST CONNECTION EITHER RIGHT OR LEFT OF HEADER.
- MODEL NUMBER SBR-44 - SBR-128 TO HAVE WELDED HOPPER W/ STUB LEG ANGLE SUPPORT LEGS.
- MODEL NUMBER SBR-1010 - SBR-1410 TO HAVE FLANGED HOPPER W/ GIRTH CHANNEL & I-BEAM SUPPORT LEGS.
- MAGNEHELIC GAUGE W/ BRACKET, TUBING, & FITTINGS.
- UNLESS OTHERWISE SPECIFIED, TIMERS SHIPPED ASSEMBLED & PRE-WIRED TO SOLENOID ENCLOSURE.
- DRAWING DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

All the information herein is confidential and has been transmitted for use solely in operating and maintaining this equipment. Reproduction or transmission of any part of this information to others or use by you for other purposes is unauthorized without the written consent of Sly, Inc. Should this equipment be sold to a third party, all drawings and installation manuals are to be returned to Sly, Inc. UNAUTHORIZED DUPLICATION, REPRODUCTION OR DISCLOSURE OF THIS INFORMATION IS A VIOLATION OF FEDERAL LAW.		SBR-P-4/6/8/10		DR. TTiffin	SLY AIR POLLUTION CONTROL Strongsville, OH 44136 slyinc.com A Division of GP239
SERIAL No. _____		CUSTOMER _____		DATE: 2/19/2026	
PURCHASE ORDER _____		FILE NUMBER _____		SCALE: AS NOTED	
CERTIFIED BY: _____		DWG. NO: _____		REV. _____	